

A fluid flow through the sensor causes precise displacement of magnetic piston that acts on a Reed Switch contact.

Technical specifications



Body	PPA (Polyphthalamide)
Spring	AISI 302 stainless steel
Internal clearance	680mm²
Maximum operating pressure	10bar
Operating temperature range	0°C to 100°C 140°C @1h
Inlet/outlet port	G 1 1/2" female
O'Ring	NBR (nitrilic rubber)
Output connection	DIN 43650 Connector - B
Enclosure rating	IP66
Electrical contact	Reed Switch

Operating Voltage	Max. Switching Power	Max. Switching Current	Peak Current
110Vac	20VA	0.2A	0.5A @20ms
220Vac	20VA	0.1A	0.5A @20ms
5Vdc	2.5W	0.5A	1A @20ms
12Vdc	5W	0.5A	1A @20ms
24Vdc*	10W	0.5A	1A @20ms

* If use contactor, RC Snubber Filter KD is required.



K8 snubber filter to electrical installation (AC)



Allen wrench to adjust the sensitivity



Results of the sensitivity test (fixed in the package)

Included:

IMPORTANT!


Internal magnetic piston susceptible to retention of ferrous particles.

Installation


- In applications without excessive vibration;
- Horizontal or vertical mounting with upward flow;
- Minimum distance 20mm from any ferrous surface;
- Mounting with parallel port connection and O'Ring.

Maintenance

1. Open the plug, remove the spring and clean using a brush if there is encrustation;
2. Mount the sensor again as below illustrated;
3. Test the electrical contact using an ohmmeter, moving the magnetic piston.

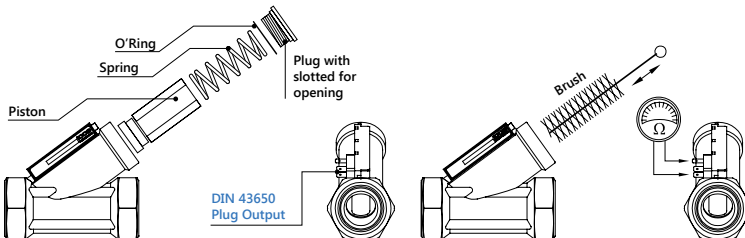

GAS (BSP) Thread: Mounting and Sealing

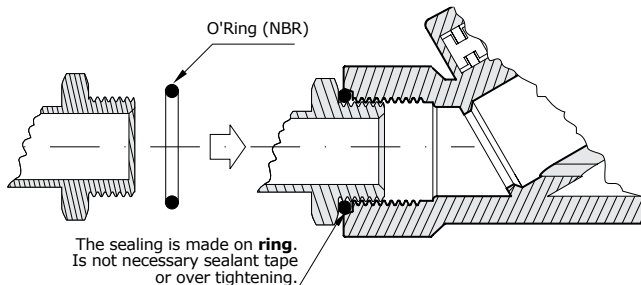


Questions? Call us BEFORE you install: +55 (15) 3032.9190

Term of Warranty

For installations according to this guide: 01 (one) year warranty.
Incorrect installation cancels the warranty - all sensors have been tested and approved.


Liquids with ferrous particles require technical analysis: the sensor has magnetic component inside.

Sensitivity Adjustment of Flow




Range for sensitivity adjustment (Ref. in water)

Mounting (Important!)

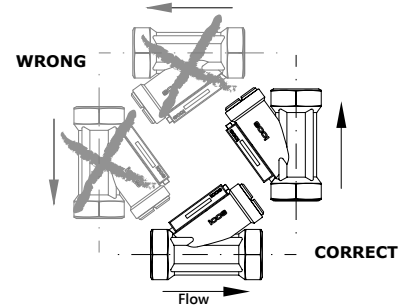

Dimensions (mm) and Weight 760g

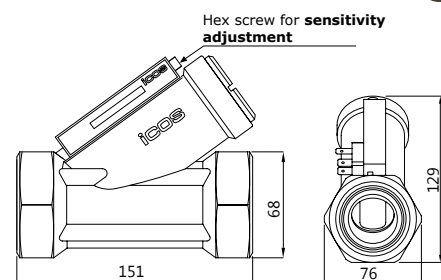

A fluid flow through the sensor causes precise displacement of magnetic piston that acts on a Reed Switch contact.

Technical specifications



Body	PPA (Polyphthalamide)
Spring	AISI 302 stainless steel
Internal clearance	680mm²
Maximum operating pressure	10bar
Operating temperature range	0°C to 100°C 140°C @1h
Inlet/outlet port	G 1½" female
O'Ring	NBR (nitrilic rubber)
Output connection	DIN 43650 Connector - B
Enclosure rating	IP66
Electrical contact	Reed Switch

Operating Voltage	Max. Switching Power	Max. Switching Current	Peak Current
110Vac	20VA	0.2A	0.5A @20ms
220Vac	20VA	0.1A	0.5A @20ms
5Vdc	2.5W	0.5A	1A @20ms
12Vdc	5W	0.5A	1A @20ms
24Vdc*	10W	0.5A	1A @20ms

* If use contactor, RC Snubber Filter KD is required.

Included:

-  K8 snubber filter to electrical installation (AC)
-  Allen wrench to adjust the sensitivity
-  Results of the sensitivity test (fixed in the package)

IMPORTANT!


Internal magnetic piston susceptible to retention of ferrous particles.

Installation


- In applications without excessive vibration;
- Horizontal or vertical mounting with upward flow;
- Minimum distance 20mm from any ferrous surface;
- Mounting with parallel port connection and O'Ring.

Maintenance

1. Open the plug, remove the spring and clean using a brush if there is encrustation;
2. Mount the sensor again as below illustrated;
3. Test the electrical contact using an ohmmeter, moving the magnetic piston.

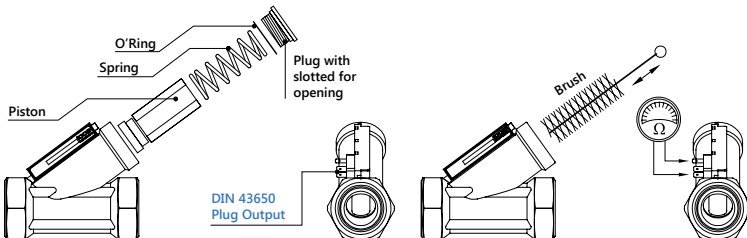

GAS (BSP) Thread: Mounting and Sealing

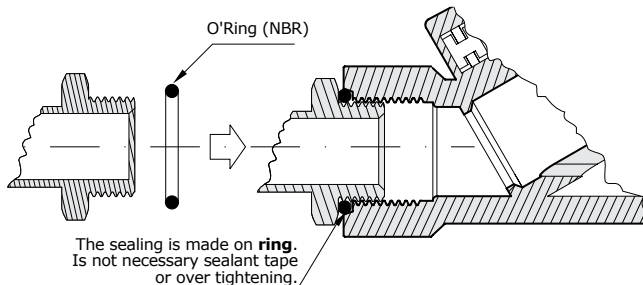

Questions? Call us BEFORE you install: +55 (15) 3032.9190

Term of Warranty

For installations according to this guide: 01 (one) year warranty.
Incorrect installation cancels the warranty - all sensors have been tested and approved.


Liquids with ferrous particles require technical analysis: the sensor has magnetic component inside.

Sensitivity Adjustment of Flow



Range for sensitivity adjustment (Ref. in water)

Mounting (Important!)

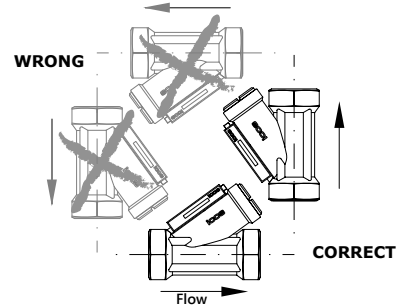

Dimensions (mm) and Weight 760g

