

Magnetic Float PP / PA12



Details • Magnetic float indicated for stem of vertical level switches, [reed switch](#).

Typical applications • For [Level Switches](#) of vertical mounting¹.

PP Magnetic Float

Material	PP - Polypropylene*
Maximum operating pressure	2bar
Operating temperature range	-10 to 100°C
Color	Dark blue
Liquid minimum density (SG)	0.70
Weight	6g

***Indicated for acids and chemicals**
(requires preliminary tests to confirm compatibility of material).
Not suitable for fuel.

PA12 Magnetic Float


Material	PA12 - Polyamide
Maximum operating pressure	2bar
Operating temperature range	-10 to 125°C
Color	Black
Liquid minimum density (SG)	0.70
Weight	6g

Mounting




Float's identification

Top or bottom mouting

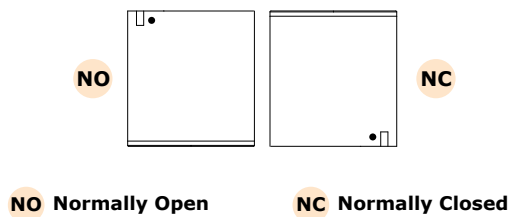

Dimensions (mm)

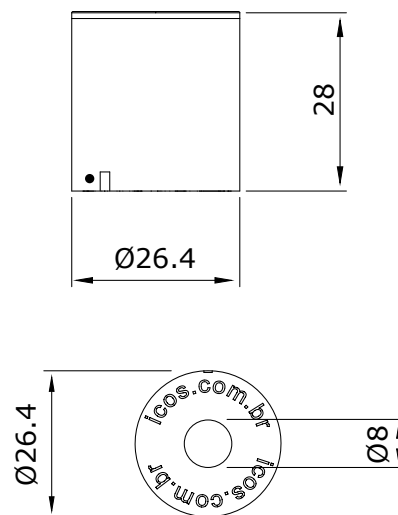

Notes

¹ **Magnetic floats are applicable to:**
• [ICOS Level Switches](#) of vertical mounting.